


Water Filtration



All dimensions in mm

FS5050

Inline Water Filtration System for Harsh Water Use

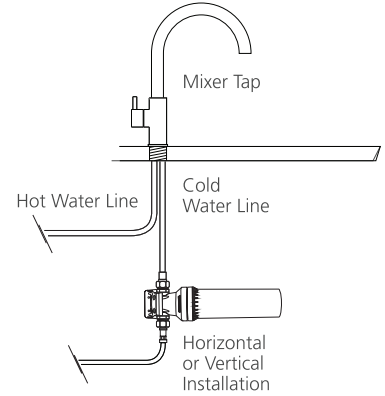


Specifications /

Micron rating	5 micron with limescale reduction
Maximum flow rate	0 - 8L per minute
Temperature rating (min / max)	2°C - 38°C
Capacity	56,700 litres or 1 year, whichever comes sooner †
System connection required	1/2" bsp
Water Pressure	70 - 500 kPa (can be installed with a pressure limiting valve)
Installation	Vertical or horizontal
Space required <i>(allows for cartridge replacement)</i>	Vertical installation: 460 mm height, 225 mm width Horizontal installation: 225 mm height, 460 mm width
Carton size	333 x 189 x 102 mm
Product weight	2 kg
Replacement cartridge model	FR5950
Warranty	6 years (refer to oliveri.com.au)
Maintenance and care instructions	Filter cartridge replacement required after 56,700 litres or annually.

Inclusions /

- Oliveri inline filter cartridge (FR5950)**
- Dual check non-return valve
- Stainless braided pex hose 550mm
- Hex nipple adaptor
- Head assembly with mounting bracket
- Mounting screws and plumbers tape
- Installation instructions

Matching accessories /

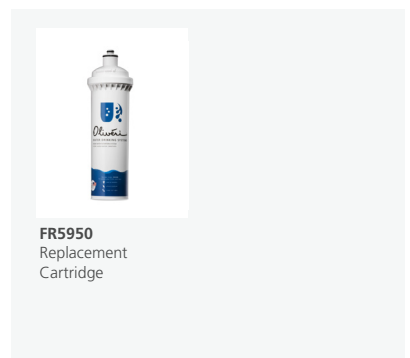

© Registered trademark of Oliveri Solutions. Under its policy of ongoing product development Oliveri Solutions may from time to time change product specification without notice. All dimensions given are approximate and should be checked prior to installation. † Filter cartridge is subject to incoming water pressure, water quality and water usage. * See oliveri.com.au for installation and warranty details.

   For more information call 08 8348 6444 or visit oliveri.com.au

BATHROOM COLLECTIVE

Phone Number: (02) 9011-5711