


Water Filtration



All dimensions in mm

FS7025

Satellite Water Filtration System with Round Goose Neck Filter Tap

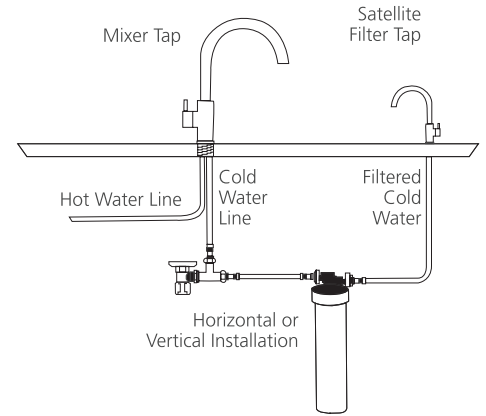


Specifications /

Micron rating	1 micron with limescale reduction
Maximum flow rate	0 - 1.9L per minute
Temperature rating (min / max)	2°C - 38°C
Capacity	9,450 litres or 1 year, whichever comes sooner †
System connection required	1/2" bsp
Water Pressure	70 - 500 kPa (can be installed with a pressure limiting valve)
Filter tap hole	13 mm
Installation	Vertical or horizontal
Space required <small>(allows for cartridge replacement)</small>	Vertical installation: 460 mm height, 225 mm width Horizontal installation: 225 mm height, 460 mm width
Carton size	306 x 174 x 139 mm
Product weight	2 kg
Replacement cartridge model	FR7905
Warranty	6 years (refer to oliveri.com.au)
Maintenance and care instructions	All surfaces should be cleaned with mild liquid detergent or soap and water. Do not use cream cleaners or citrus based cleaning products, as they are abrasive. Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.

Inclusions /

- Polished chrome filter tap with adaptor**
- Oliveri filter cartridge (FR7905)**
- Head assembly with mounting bracket
- Dual check non-return valve
- Cold water isolation mini cistern tap
- Stainless braided pex hose 750mm
- Mounting screws and plumbers tape
- Installation instructions

Matching accessories /

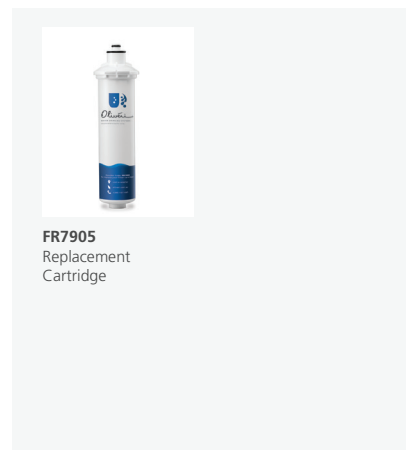

© Registered trademark of Oliveri Solutions. Under its policy of ongoing product development Oliveri Solutions may from time to time change product specification without notice. All dimensions given are approximate and should be checked prior to installation. † Filter cartridge is subject to incoming water pressure, water quality and water usage. * See oliveri.com.au for installation and warranty details.



For more information call 08 8348 6444 or visit oliveri.com.au

BATHROOM COLLECTIVE

Phone Number: (02) 9011-5711