


# Sigma8 Concealed Cistern

BTW Cistern 4 Star 109.795.00.1

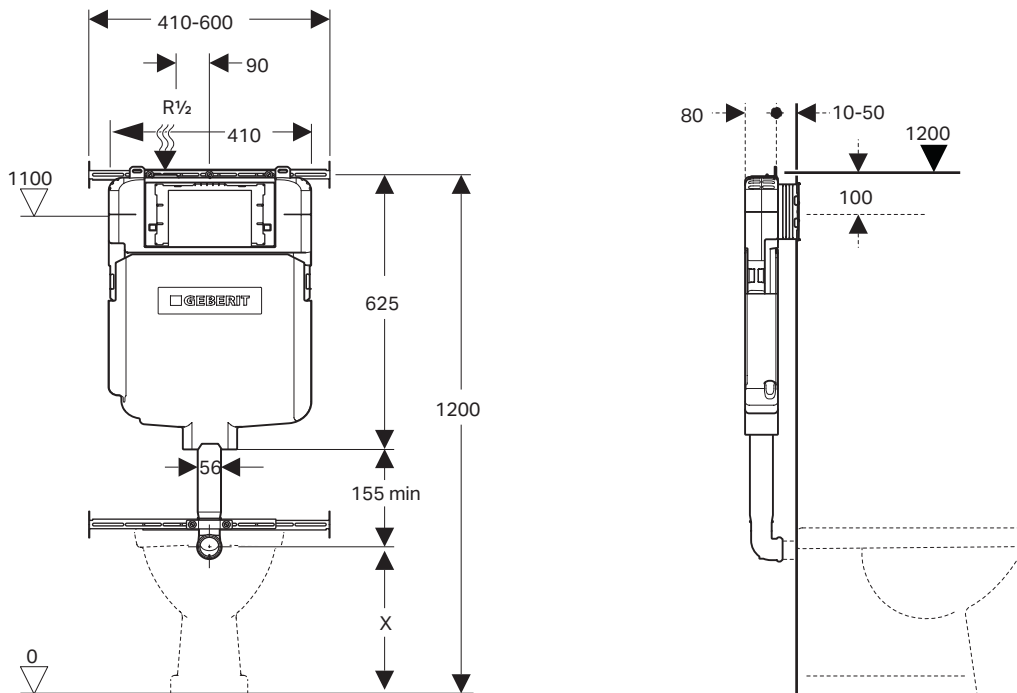

|                           |                                                                 |
|---------------------------|-----------------------------------------------------------------|
| <b>Article No.</b>        | 109.794.00.1 (6/3L)   109.795.00.1 (4.5/3L)                     |
| <b>Installation type</b>  | In-wall, stud or brick 90mm                                     |
| <b>WELS rating</b>        | 3 Star (6/3L) or 4 Star (4.5/3L)                                |
| <b>Pan type</b>           | BTW S or P Trap – suits all major brands                        |
| <b>Standards</b>          | Watermark                                                       |
| <b>Operating Pressure</b> | 10-1000Kpa                                                      |
| <b>Operation</b>          | Mechanical Front Flush                                          |
| <b>Warranty</b>           | 15 years on cistern tanks and frames, 3 years on valve products |

Sigma plates compatible with Sigma cisterns.

Sigma60: Requires minimum 30mm wall thickness

\* Separate service access required with pneumatic buttons