


Sigma8 Duofix Concealed Cistern with Frame

WH Cistern 4 Star 111.698.00.1

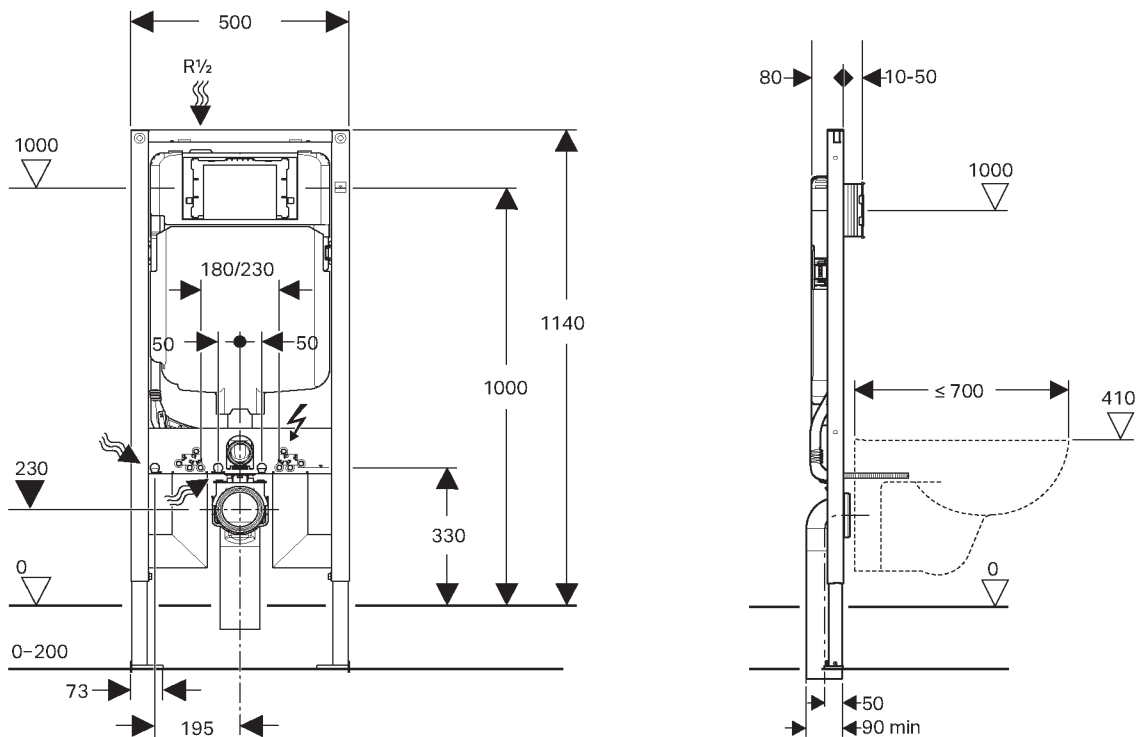

Article No.	111.697.00.1 (6/3L) 111.698.00.1 (4.5/3L)
Installation type	In-wall, stud 90mm
WELS rating	3 Star (6/3L) or 4 Star (4.5/3L)
Pan type	Wall hung, suits all major brands
Standards	Watermark
Operating Pressure	10-1000Kpa
Operation	Mechanical Front Flush
Load rating	400Kg
Warranty	15 years on cistern tanks and frames, 3 years on internal components

Sigma plates compatible with Sigma cisterns.

Sigma60: Requires minimum 30mm wall thickness

* Separate service access required with pneumatic buttons