


Roeburn with Rinse

AUSH.4846

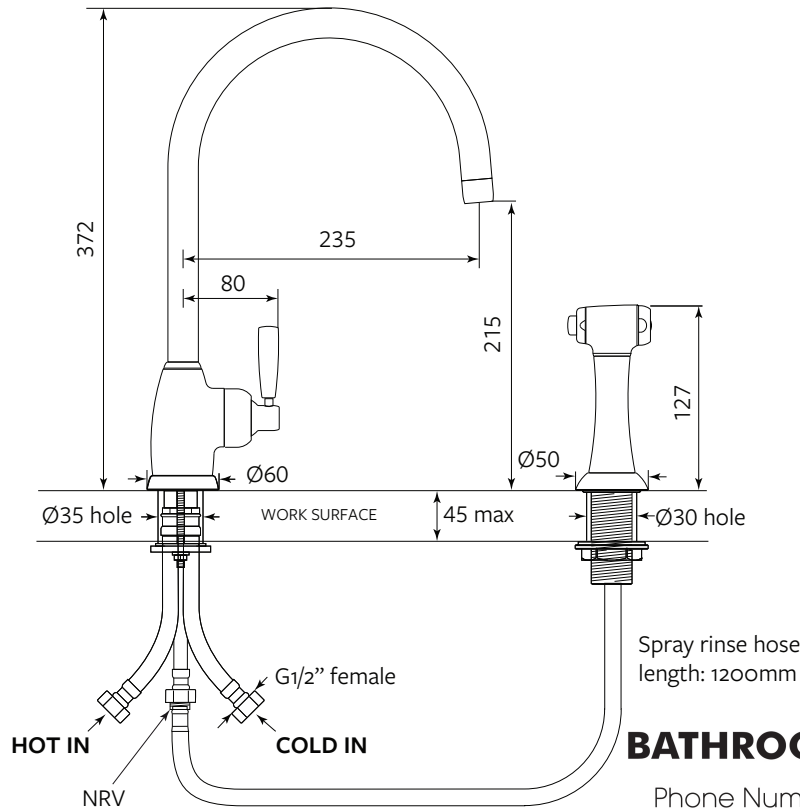

BATHROOM COLLECTIVE

Phone Number: (02) 9011-5711

| MODEL | CODE |
|--|-------------|
| Roeburn with Rinse - Chrome | AUSH.4846CP |
| Roeburn with Rinse - Nickel | AUSH.4846NI |
| Roeburn with Rinse - Pewter | AUSH.4846PF |
| Roeburn with Rinse - English Bronze | AUSH.4846EB |
| Roeburn with Rinse - Satin Brass | AUSH.4846SB |
| Roeburn with Rinse - Polished Brass | AUSH.4846BR |
| Roeburn with Rinse - Gold <i>(special order)</i> | AUSH.4846IG |

Also Available: Roeburn (AUSH.4841) non spray-rinse model.



Features include:

- Handcrafted in the United Kingdom using DZR brass
- Separate bench-mounted insulated spray rinse tap with 1.2m flexible hose
- Single metal lever handle with engraved temperature indicators
- 1/4 turn German ceramic disc flow control
- Vernier insert for accurate handle alignment
- Supplied with dual check valve - Con-Serv DC 057
- 15 Year warranty. Please visit our website for individual finish warranties

Spray Rinse Requirements :

The spray rinse requires a minimum inlet water pressure of 100kPa, and a maximum of 500kPa to completely divert the water flow from the tap to the spray rinse.

Temperature range: Min 1°C. Max 70°C

Working Pressure: Min 1 Bar/15psi. Max 5 Bar/75psi

Packed Weight: 3.65kg

Flow Rates: 1 Bar: 5.3L/min

2 Bar: 9.3L/min

3 Bar: 11.2L/min



WaterMark

ASINZS 3718
WMKA02818
SAI Global

Perrin & Rowe
tapware

