


# CLASSIC DUO OVAL FREESTANDING

- pure simplicity and unpretentious elegance are what distinguish these baths
- bathing with a friend: two identical back rests and centrally positioned waste
- the moulded panel emphasises the high design standard and enables the bath to be free-standing
- made of KALDEWEI steel enamel



Similar illustration

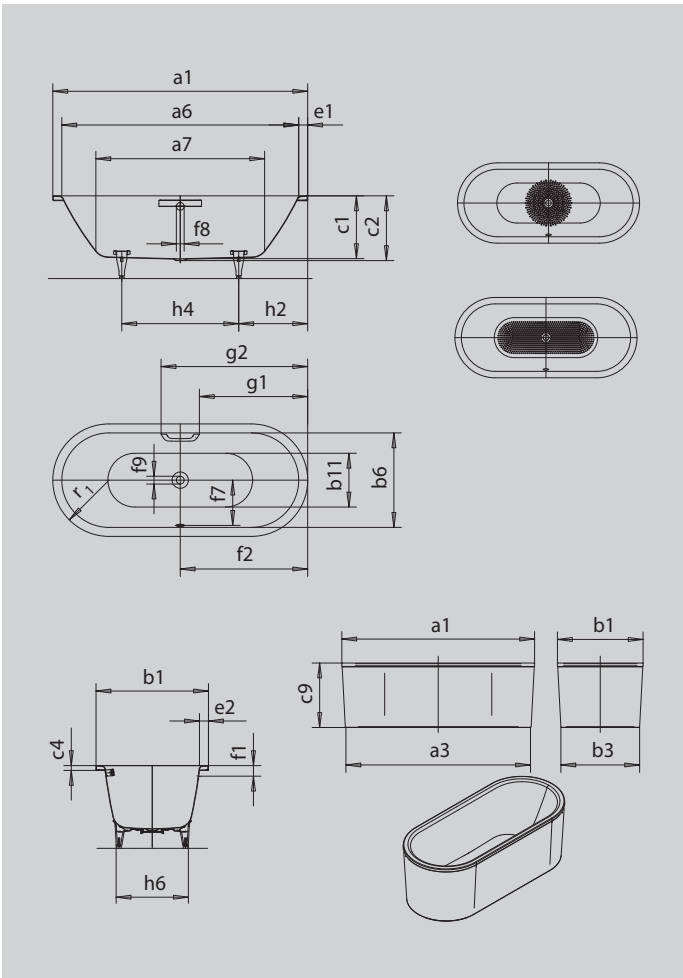

GRIP DISCREET OPULENCE



| Model                                                    |                                 | 113          |
|----------------------------------------------------------|---------------------------------|--------------|
| External length                                          | a <sub>1</sub>                  | 1700 mm      |
| External length (bottom)                                 | a <sub>3</sub>                  | 1635 mm      |
| Internal length (top)                                    | a <sub>6</sub>                  | 1580 mm      |
| Internal length (bottom)                                 | a <sub>7</sub>                  | 1130 mm      |
| External width                                           | b <sub>1</sub>                  | 750 mm       |
| External width (bottom)                                  | b <sub>3</sub>                  | 685 mm       |
| Internal width (top)                                     | b <sub>6</sub>                  | 630 mm       |
| Internal width (bottom)                                  | b <sub>11</sub>                 | 500 mm       |
| Depth inside                                             | c <sub>1</sub>                  | 420 mm       |
| Depth incl. waste hole                                   | c <sub>2</sub>                  | 430 mm       |
| Height of rim                                            | c <sub>4</sub>                  | 32 mm        |
| Overall height with panel                                | c <sub>9</sub>                  | 602 mm       |
| Width of rim (foot end; long side)                       | e <sub>1</sub> ; e <sub>2</sub> | 60; 60 mm    |
| Distance top edge to centre of overflow hole             | f <sub>1</sub>                  | 70 mm        |
| Distance bath edge to centre of waste hole               | f <sub>2</sub>                  | 850 mm       |
| Distance centre of waste hole to centre of overflow hole | f <sub>7</sub>                  | 305 mm       |
| Diameter of overflow hole                                | f <sub>8</sub>                  | Ø 52 mm      |
| Diameter of waste hole                                   | f <sub>9</sub>                  | Ø 52 mm      |
| Distance bath edge (foot end) to start of grip           | g <sub>1</sub>                  | 722 mm       |
| Distance bath edge (foot end) to end of grip             | g <sub>2</sub>                  | 978 mm       |
| Distance foot end of bath edge to centre of foot         | h <sub>2</sub>                  | 560 mm       |
| Distance between the feet                                | h <sub>4</sub>                  | 580 mm       |
| Width of feet max.                                       | h <sub>6</sub>                  | 450 mm       |
| External radius                                          | r <sub>1</sub>                  | 375 mm       |
| Water volume                                             |                                 | 124 l        |
| Net weight                                               |                                 | 78 kg        |
| Diameter of anti-slip                                    |                                 | Ø 435 mm     |
| Full anti-slip                                           |                                 | 900 x 300 mm |